


KSOB-10 轴套规格及公差 KSOB-10 Sleeve Bushing Specification & Tolerance

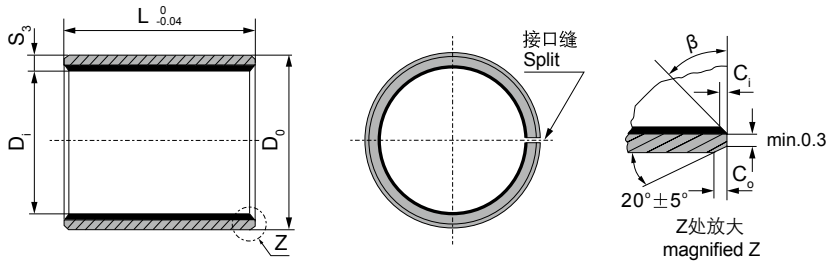

内外倒角 ID and OD chamfers

S ₃	C _o	C _i	β
0.75	0.5±0.3	0.25±0.2	30°±5°
1.00	0.6±0.3	0.30±0.2	30°±5°
1.50	0.7±0.3	0.50±0.3	30°±5°

S ₃	C _o	C _i	β
2.00	1.2±0.4	0.50±0.3	30°±5°
2.50	1.8±0.6	0.60±0.3	45°±5°

单位Unit: mm

轴径(f7) Shaft D _s	座孔(H7) Housing D _H	(OD) 外径公差 Tolerance D _O	(ID)压装后 内孔公差 After fixed D _{i,a}	配合间隙 Clearance D ₀	壁厚 Wall thick- ness S ₃	长度 L ⁰ -0.40 (d≤Φ28 L-0.30) d>Φ30 L-0.40														
						6	8	10	12	15	20	25	30	40	50					
6 -0.010 -0.022	8 +0.015	8 +0.055 +0.025	6.055 5.990	0.077 0.000	1.005 0.980	0606	0608	0610												
8 -0.013 -0.028	10 +0.015	10 +0.055 +0.025	8.055 7.990	0.083 0.003		0806	0808	0810	0812	0815										
10 -0.013 -0.028	12 +0.018	12 +0.065 +0.030	10.058 9.990	0.086 0.003		1006	1008	1010	1012	1015	1020									
12 -0.016 -0.034	14 +0.018	14 +0.065 +0.030	12.058 11.990	0.092 0.006		1206	1208	1210	1212	1215	1220	1225								
13 -0.016 -0.034	15 +0.018	15 +0.065 +0.030	13.058 12.990						1310	1312	1315	1320	1325							
14 -0.016 -0.034	16 +0.018	16 +0.065 +0.030	14.058 13.990						1410	1412	1415	1420	1425							
15 -0.016 -0.034	17 +0.018	17 +0.065 +0.030	15.058 14.990						1510	1512	1515	1520	1525							
16 -0.016 -0.034	18 +0.018	18 +0.065 +0.030	16.058 15.990	0.095 0.006				1610	1612	1615	1620	1625								
17 -0.016 -0.034	19 +0.021	19 +0.075 +0.035	17.061 16.990					1710	1712	1715	1720	1725								
18 -0.016 -0.034	20 +0.021	20 +0.075 +0.035	18.061 17.990	0.112 0.010			1810	1812	1815	1820	1825									
20 -0.020 -0.041	23 +0.021	23 +0.075 +0.035	20.071 19.990					2010	2012	2015	2020	2025	2030							
22 -0.020 -0.041	25 +0.021	25 +0.075 +0.035	22.071 21.990					2210	2212	2215	2220	2225	2230							
24 -0.020 -0.041	27 +0.021	27 +0.075 +0.035	24.071 23.990					2410	2412	2415	2420	2425	2430							
25 -0.020 -0.041	28 +0.021	28 +0.075 +0.035	25.071 24.990	0.126 0.010			2510	2512	2515	2520	2525	2530	2540	2550						
28 -0.020 -0.041	32 +0.025	32 +0.085 +0.045	28.085 27.990					2812	2815	2820	2825	2830	2840	2850						
30 -0.020 -0.041	34 +0.025	34 +0.085 +0.045	30.085 29.990					3012	3015	3020	3025	3030	3040	3050						
32 -0.025 -0.050	36 +0.025	36 +0.085 +0.045	32.085 31.990		0.135 0.015			3212	3215	3220	3225	3230	3240	3250						
35 -0.025 -0.050	39 +0.025	39 +0.085 +0.045	35.085 34.990						3512	3515	3520	3525	3530	3540	3550					
38 -0.025 -0.050	42 +0.025	42 +0.085 +0.045	38.085 37.990						3812	3815	3820	3825	3830	3840	3850					
40 -0.025 -0.050	44 +0.025	44 +0.085 +0.045	40.085 39.990						4012	4015	4020	4025	4030	4040	4050					

KSQB-10 轴套规格及公差 KSQB-10 Sleeve Bushing Specification & Tolerance

单位Unit: mm

轴径(f7) Shaft D _s	座孔(H7) Housing D _H	(OD) 外径公差 Tolerance D _O	(ID)压装后 内孔公差 After fixed D _{ia}	配合间隙 Clearance D _b	壁厚 Wall thick- ness S ₃	长度 L ⁰ -0.40															
						20	25	30	40	50	60	70	80	100	115						
45 -0.050 -0.025	50 +0.025	50 +0.085 +0.045	45.105 44.990	0.155 0.015	2.505 2.460	4520	4525	4530	4540	4550											
50 -0.050 -0.025	55 +0.030	55 +0.100 +0.055	50.110 49.990	0.160 0.015		5020	5025	5030	5040	5050	5060										
55 -0.060 -0.030	60 +0.030	60 +0.100 +0.055	55.110 54.990	0.170 0.020				5530	5540	5550	5560										
60 -0.060 -0.030	65 +0.030	65 +0.100 +0.055	60.110 59.990					6030	6040	6050	6060	6070									
65 -0.060 -0.030	70 +0.030	70 +0.100 +0.055	65.110 64.990						6530	6540	6550	6560	6570								
70 -0.060 -0.030	75 +0.030	75 +0.100 +0.055	70.110 69.990							7030	7040	7050	7060	7070	7080						
75 -0.060 -0.030	80 +0.030	80 +0.100 +0.055	75.110 74.990							7530	7540	7550	7560	7570	7580						
80 -0.045	85 +0.035	85 +0.120 +0.070	80.155 80.020	0.201 0.020	2.490 2.440				8040	8050	8060	8070	8080	80100							
85 -0.054	90 +0.035	90 +0.120 +0.070	85.155 85.020	0.209 0.020					8540	8550	8560	8570	8580	85100							
90 -0.054	95 +0.035	95 +0.120 +0.070	90.155 90.020							9040	9050	9060	9070	9080	90100						
95 -0.054	100 +0.035	100 +0.120 +0.070	95.155 95.020								9550	9560	9570	9580	95100						
100 -0.054	105 +0.035	105 +0.120 +0.070	100.155 100.020									10050	10060	10070	10080	100100	100115				
105 -0.054	110 +0.035	110 +0.120 +0.070	105.155 105.020										10560	10570	10580	105100	105115				
110 -0.054	115 +0.035	115 +0.120 +0.070	110.115 110.020											11060	11070	11080	110100	110115			
120 -0.054	125 +0.040	125 +0.170 +0.100	120.210 120.070	0.264 0.070	2.465 2.415							12060	12070	12080	120100	120115					
125 -0.063	130 +0.040	130 +0.170 +0.100	125.210 125.070	0.273 0.070									12560	12570	12580	125100	125115				
130 -0.063	135 +0.040	135 +0.170 +0.100	130.210 130.070											13060	13070	13080	130100	130115			
140 -0.063	145 +0.040	145 +0.170 +0.100	140.210 140.070												14060	14070	14080	140100	140115		
150 -0.063	155 +0.040	155 +0.170 +0.100	150.210 150.070													15060	15070	15080	150100	150115	
160 -0.063	165 +0.040	165 +0.170 +0.100	160.210 160.070														16060	16070	16080	160100	160115
180 -0.063	185 +0.046	185 +0.210 +0.130	180.216 180.070			0.279 0.070	2.465 2.415								18060	18070	18080	180100			
190 -0.072	195 +0.046	195 +0.210 +0.130	190.216 190.070	0.288 0.070										19060	19070	19080	190100				
200 -0.072	205 +0.046	205 +0.210 +0.130	200.016 200.070												20060	20070	20080	200100			
220 -0.072	225 +0.046	225 +0.210 +0.130	220.216 220.070												22060	22070	22080	220100			
250 -0.072	255 +0.052	255 +0.260 +0.170	250.222 250.070	0.294 0.070	2.465 2.415										25080	250100					
260 -0.081	265 +0.052	265 +0.260 +0.170	260.222 260.070	0.303 0.070													26080	260100			
280 -0.081	285 +0.052	285 +0.260 +0.170	280.222 280.070														28080	280100			
300 -0.081	305 +0.052	305 +0.260 +0.170	300.222 300.070														30080	300100			